



A smooth design solution for a seamless look

PAR30/PAR20 LED

Philips PAR30S LED Single Optic Lamps with AirFlux Technology provide superior lighting aesthetics and optimal thermal efficiency in a sleek, lightweight design.

Benefits

- Will not fade colors, avoids inventory spoilage
- Lowers maintenance costs by reducing re-lamp frequency
- 5-year limited warranty**
- ** For details see:
http://www.usa.lighting.philips.com/connect/tools_literature/warranties.wpd.

Features

- Retail Optic reduces glare to improve shopper experience
- 25,000-hour rated average life*
- 12W PAR30S saves 63 watts when compared to a 75W halogen PAR30S
- 83 CRI for excellent color rendering
- Virtually UV/IR free in the beam
- Contains no mercury

Application

- Ideal for general and accent lighting in retail, hospitality and office spaces.

PAR30/PAR20 LED

Versions



E26 PAR30S



12.5 W E26 PAR30S Black



E26 PAR30S



E26 PAR30L



E26 PAR30S



E26 PAR20



E26 PAR20



LEDspot PAR30L



LEDspot PAR30S



LEDspot PAR30S



E26 PAR30L



E26 PAR30S






E26,PAR20



LEDspot PAR30S

PAR30/PAR20 LED

Dimensional drawing

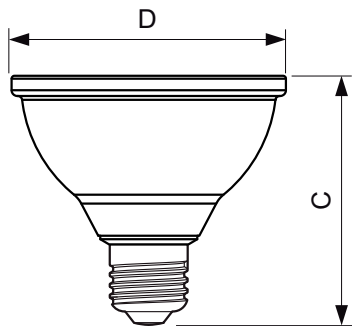

Product	D	C
120V PAR30L 12.7W 25D 2700K 900 D SO	92 mm	116 mm
120V PAR30L 12.7W 25D 3000K 900 D SO	92 mm	116 mm
120V PAR30L 12.7W 25D 4000K 900 D SO	92 mm	116 mm
120V PAR30L 12.7W 35D 4000K 900 D SO	92 mm	116 mm
120V PAR30L 12.7W 35D 3000K 900 D SO	92 mm	116 mm
120V PAR30L 12.7W 35D 2700K 900 D SO	92 mm	116 mm





Product	D	C
120V PAR30S 12W 15D 2700K 900 D AF SO	92 mm	92.7 mm
120V PAR30S 12W 15D 3000K 900 D AF SO	92 mm	92.7 mm
120V PAR30S 12W 35D 2700K 900 D AF SO	92 mm	92.7 mm
120V PAR30S 12W 25D 3000K 900 D AF SO	92 mm	92.7 mm
120V PAR30S 12W 35D 4000K 900 D AF SO	92 mm	92.7 mm
120V PAR30S 12W 25D 2700K 900 D AF SO	92 mm	92.7 mm
120V PAR30S 12W 25D 4000K 900 D AF SO	92 mm	92.7 mm
120V PAR30S 12W 35D 3000K 900 D AF SO	92 mm	92.7 mm
12 PAR30S/F25 2700 DIM Black	92 mm	92.7 mm
12 PAR30S/F25 3000 DIM Black	92 mm	92.7 mm
120V PAR30S 12.5W 25D 3000K 780 CW SO	92 mm	93 mm
120V PAR30S 12W 35D 3500K 900 AF SO	92 mm	93 mm
120V PAR30S 12.5W 15D 3000K 780 CW SO	92 mm	93 mm
120V PAR30S 12.5W 15D 3000K 780 CW SOB	92 mm	93 mm

Product	D	C
120V PAR20 SO 6W 35D 2700K DIM	63.2 mm	82.6 mm
120V PAR20 SO 6W 25D 4000K DIM	63.2 mm	82.6 mm
120V PAR20 SO 6W 15D 2700K DIM	63.2 mm	82.6 mm
120V PAR20 SO 6W 25D 3000K DIM	63.2 mm	82.6 mm
120V PAR20 SO 6W 25D 2700K DIM	63.2 mm	82.6 mm
120V PAR20 SO 6W 35D 4000K DIM	63.2 mm	82.6 mm
120V PAR20 SO 6W 25D 2700K DIM Black	63.2 mm	82.6 mm
120V PAR20 SO 6W 25D 3000K DIM Black	63.2 mm	82.6 mm
120V PAR20 SO 6W 35D 3000K DIM	63.2 mm	82.6 mm

Product	D	C
12PAR30S/AMB/F40/830/DIM ULW	95 mm	95 mm
12PAR30S/AMB/F25/840/DIM ULW	95 mm	95 mm
12PAR30S/AMB/F40/840/DIM ULW	95 mm	95 mm
12PAR30S/AMB/F25/827/DIM ULW	95 mm	95 mm
12PAR30S/AMB/F25/830/DIM ULW	95 mm	95 mm
12PAR30S/AMB/F40/827/DIM ULW	95 mm	95 mm

PAR30/PAR20 LED

Dimensional drawing



Product	D	C
12PAR30L/AMB/F40/827/DIM ULW	95 mm	115 mm
12PAR30L/AMB/F25/840/DIM ULW	95 mm	115 mm
12PAR30L/AMB/F25/830/DIM ULW	95 mm	115 mm
12PAR30L/AMB/F40/840/DIM ULW	95 mm	115 mm
12PAR30L/AMB/F40/830/DIM ULW	95 mm	115 mm
12PAR30L/AMB/F25/827/DIM ULW	95 mm	115 mm

Product	D	C
12PAR30L/EXPERTCOLOR RETAIL/S10/930/DIM	94.8 mm	116.1 mm
12PAR30L/EXPERTCOLOR RETAIL/F25/930/DIM	94.8 mm	116.1 mm
12PAR30L/EXPERTCOLOR RETAIL/F40/930/DIM	94.8 mm	116.1 mm
12PAR30L/EXPERTCOLOR/F25/927/DIM	94.8 mm	93.1 mm
12PAR30L/EXPERTCOLOR/F40/927/DIM	94.8 mm	93.1 mm
12PAR30L/EXPERTCOLOR/F25/940/DIM	94.8 mm	116.1 mm
12PAR30L/EXPERTCOLOR/F40/940/DIM	94.8 mm	116.1 mm

Product	D	C
12PAR30S/EXPERTCOLOR RETAIL/F25/930/DIM	94.8 mm	93.1 mm
12PAR30S/EXPERTCOLOR RETAIL/S10/930/DIM	94.8 mm	93.1 mm
12PAR30S/EXPERTCOLOR RETAIL/F40/930/DIM	94.8 mm	93.1 mm
12PAR30S/EXPERTCOLOR RETAIL/F25/930/DIMB	94.8 mm	93.1 mm
12PAR30S/EXPERTCOLOR/S10/927/DIM	94.8 mm	93.1 mm
12PAR30S/EXPERTCOLOR/F40/940/DIM	120.7 mm	134.6 mm
12PAR30S/EXPERTCOLOR/F25/927/DIM B	94.8 mm	116.1 mm
12PAR30S/EXPERTCOLOR/F40/927/DIM	94.8 mm	116.1 mm
12PAR30S/EXPERTCOLOR/S10/940/DIM/120V	94.8 mm	93.1 mm
12PAR30S/EXPERTCOLOR/F25/940/DIM	120.7 mm	134.6 mm
12PAR30S/EXPERTCOLOR/F25/927/DIM	94.8 mm	93.1 mm

Product	D	C
7PAR20/LED/F25/827-822/E26/GL/DIM 120V	63 mm	85.5 mm
7PAR20/LED/F40/830/E26/GL/DIM 120V	63 mm	85.5 mm
7PAR20/LED/F40/840/E26/GL/DIM 120V	63 mm	85.5 mm
7PAR20/LED/F40/827-822/E26/GL/DIM 120V	63 mm	85.5 mm
7PAR20/LED/F25/840/E26/GL/DIM 120V	63 mm	85.5 mm
7PAR20/LED/F25/830/E26/GL/DIM 120V	63 mm	85.5 mm

PAR30/PAR20 LED

Operating and Electrical

Voltage (Nom) 120 V

Starting Time (Nom) 0.5 s

General Information

Cap-Base E26

Light Technical

Llmf At End Of Nominal Lifetime (Nom) 70 %

Approval and Application

Order Code	Full Product Name	Energy Consumption kWh/1000 h	Energy Efficiency Label (EEL)
929000257604	120V PAR30S 12W 35D 3500K 900 AF SO	12 kWh	A
929001110004	120V PAR30S 12.5W 15D 3000K 780 CW SO	13 kWh	A
929001110204	120V PAR30S 12.5W 25D 3000K 780 CW SO	13 kWh	A
929001110104	120V PAR30S 12.5W 15D 3000K 780 CW SOB	13 kWh	A
929001112204	120V PAR30S 12W 15D 2700K 900 D AF SO	-	Not applicable
929001112304	120V PAR30S 12W 15D 3000K 900 D AF SO	-	Not applicable
929001112504	120V PAR30S 12W 25D 2700K 900 D AF SO	-	Not applicable
929001112604	120V PAR30S 12W 25D 3000K 900 D AF SO	-	Not applicable
929001112704	120V PAR30S 12W 25D 4000K 900 D AF SO	-	Not applicable
929001112804	120V PAR30S 12W 35D 2700K 900 D AF SO	-	Not applicable
929001112904	120V PAR30S 12W 35D 3000K 900 D AF SO	-	Not applicable
929001113004	120V PAR30S 12W 35D 4000K 900 D AF SO	-	Not applicable
929001132304	120V PAR30L 12.7W 25D 2700K 900 D SO	-	Not applicable
929001132404	120V PAR30L 12.7W 25D 3000K 900 D SO	-	Not applicable
929001132504	120V PAR30L 12.7W 25D 4000K 900 D SO	-	Not applicable
929001132604	120V PAR30L 12.7W 35D 2700K 900 D SO	-	Not applicable
929001132704	120V PAR30L 12.7W 35D 3000K 900 D SO	-	Not applicable
929001132804	120V PAR30L 12.7W 35D 4000K 900 D SO	-	Not applicable
929001186304	12 PAR30S/F25 2700 DIM Black	-	Not applicable
929001193804	12 PAR30S/F25 3000 DIM Black	-	Not applicable

Order Code	Full Product Name	Energy Consumption kWh/1000 h	Energy Efficiency Label (EEL)
929001224704	120V PAR20 SO 6W 15D 2700K DIM	-	Not applicable
929001225004	120V PAR20 SO 6W 25D 2700K DIM	-	Not applicable
929001225104	120V PAR20 SO 6W 25D 3000K DIM	-	Not applicable
929001225204	120V PAR20 SO 6W 25D 4000K DIM	-	Not applicable
929001225304	120V PAR20 SO 6W 35D 2700K DIM	-	Not applicable
929001225404	120V PAR20 SO 6W 35D 3000K DIM	-	Not applicable
929001225504	120V PAR20 SO 6W 35D 4000K DIM	-	Not applicable
929001225904	120V PAR20 SO 6W 25D 2700K DIM Black	-	Not applicable
929001226004	120V PAR20 SO 6W 25D 3000K DIM Black	-	Not applicable
929001285604	12PAR30L/EXPERTCOLOR RETAIL/S10/930/DIM	-	-
929001285704	12PAR30L/EXPERTCOLOR RETAIL/F25/930/DIM	-	-
929001285804	12PAR30L/EXPERTCOLOR RETAIL/F40/930/DIM	-	-
929001285904	12PAR30S/EXPERTCOLOR RETAIL/S10/930/DIM	-	-
929001340404	12PAR30S/EXPERTCOLOR/F40/927/DIM	-	-
929001340604	12PAR30S/EXPERTCOLOR/F25/927/DIM B	-	-
929001341104	12PAR30L/EXPERTCOLOR/F25/940/DIM	-	-
929001341204	12PAR30L/EXPERTCOLOR/F40/940/DIM	-	-
929001286004	12PAR30S/EXPERTCOLOR RETAIL/F25/930/DIM	-	-
929001286104	12PAR30S/EXPERTCOLOR RETAIL/F40/930/DIM	-	-
929001340204	12PAR30S/EXPERTCOLOR/S10/927/DIM	-	-
929001340904	12PAR30L/EXPERTCOLOR/F25/927/DIM	-	-
929001341004	12PAR30L/EXPERTCOLOR/F40/927/DIM	-	-
929001369704	12PAR30S/EXPERTCOLOR/S10/940/DIM/120V	-	-
929001286204	12PAR30S/EXPERTCOLOR RETAIL/F25/930/DIMB	-	-

PAR30/PAR20 LED

Order Code	Full Product Name	Energy Consumption kWh/1000 h	Energy Efficiency Label (EEL)
929001340304	12PAR30S/EXPERTCOLOR/ F25/927/DIM	-	-
929001294004	12PAR30L/AMB/F25/827/DIM ULW	-	-
929001294104	12PAR30L/AMB/F25/830/DIM ULW	-	-
929001294204	12PAR30L/AMB/F25/840/DIM ULW	-	-
929001294404	12PAR30L/AMB/F40/827/DIM ULW	-	-
929001294504	12PAR30L/AMB/F40/830/DIM ULW	-	-
929001294604	12PAR30L/AMB/F40/840/DIM ULW	-	-
929001294804	12PAR30S/AMB/F25/827/DIM ULW	-	-
929001294904	12PAR30S/AMB/F25/830/DIM ULW	-	-
929001295004	12PAR30S/AMB/F25/840/DIM ULW	-	-
929001295204	12PAR30S/AMB/F40/827/DIM ULW	-	-
929001295304	12PAR30S/AMB/F40/830/DIM ULW	-	-

Controls and Dimming

Order Code	Full Product Name	Dimmable
929000257604	120V PAR30S 12W 35D 3500K 900 AF SO	No
929001110004	120V PAR30S 12.5W 15D 3000K 780 CW SO	No
929001110204	120V PAR30S 12.5W 25D 3000K 780 CW SO	No
929001110104	120V PAR30S 12.5W 15D 3000K 780 CW SOB	No
929001112204	120V PAR30S 12W 15D 2700K 900 D AF SO	Yes
929001112304	120V PAR30S 12W 15D 3000K 900 D AF SO	Yes
929001112504	120V PAR30S 12W 25D 2700K 900 D AF SO	Yes
929001112604	120V PAR30S 12W 25D 3000K 900 D AF SO	Yes
929001112704	120V PAR30S 12W 25D 4000K 900 D AF SO	Yes
929001112804	120V PAR30S 12W 35D 2700K 900 D AF SO	Yes
929001112904	120V PAR30S 12W 35D 3000K 900 D AF SO	Yes
929001113004	120V PAR30S 12W 35D 4000K 900 D AF SO	Yes
929001132304	120V PAR30L 12.7W 25D 2700K 900 D SO	Yes
929001132404	120V PAR30L 12.7W 25D 3000K 900 D SO	Yes
929001132504	120V PAR30L 12.7W 25D 4000K 900 D SO	Yes
929001132604	120V PAR30L 12.7W 35D 2700K 900 D SO	Yes
929001132704	120V PAR30L 12.7W 35D 3000K 900 D SO	Yes
929001132804	120V PAR30L 12.7W 35D 4000K 900 D SO	Yes
929001186304	12 PAR30S/F25 2700 DIM Black	Yes
929001193804	12 PAR30S/F25 3000 DIM Black	Yes
929001224704	120V PAR20 SO 6W 15D 2700K DIM	Yes
929001225004	120V PAR20 SO 6W 25D 2700K DIM	Yes
929001225104	120V PAR20 SO 6W 25D 3000K DIM	Yes
929001225204	120V PAR20 SO 6W 25D 4000K DIM	Yes
929001225304	120V PAR20 SO 6W 35D 2700K DIM	Yes
929001225404	120V PAR20 SO 6W 35D 3000K DIM	Yes
929001225504	120V PAR20 SO 6W 35D 4000K DIM	Yes
929001225904	120V PAR20 SO 6W 25D 2700K DIM Black	Yes
929001226004	120V PAR20 SO 6W 25D 3000K DIM Black	Yes
929001285604	12PAR30L/EXPERTCOLOR RETAIL/S10/930/DIM	Yes
929001285704	12PAR30L/EXPERTCOLOR RETAIL/F25/930/DIM	Yes
929001285804	12PAR30L/EXPERTCOLOR RETAIL/F40/930/DIM	Yes
929001285904	12PAR30S/EXPERTCOLOR RETAIL/S10/930/DIM	Yes

Order Code	Full Product Name	Energy Consumption kWh/1000 h	Energy Efficiency Label (EEL)
929001295404	12PAR30S/AMB/F40/840/DIM ULW	-	-
929001316504	7PAR20/LED/F25/830/E26/GL/DIM 120V	-	-
929001316704	7PAR20/LED/F25/840/E26/GL/DIM 120V	-	-
929001316904	7PAR20/LED/F40/830/E26/GL/DIM 120V	-	-
929001317004	7PAR20/LED/F40/840/E26/GL/DIM 120V	-	-
929001317204	7PAR20/LED/F25/827-822/E26/GL/DIM 120V	-	-
929001317304	7PAR20/LED/F40/827-822/E26/GL/DIM 120V	-	-
929001340704	12PAR30S/EXPERTCOLOR/ F25/940/DIM	-	-
929001340804	12PAR30S/EXPERTCOLOR/ F40/940/DIM	-	-

PAR30/PAR20 LED

Operating and Electrical

Order Code	Full Product Name	Input Frequency	Wattage Equivalent	Power (Rated) (Nom)
929000257604	120V PAR30S 12W 35D 3500K 900 AF SO	60 Hz	75 W	12 W
929001110004	120V PAR30S 12.5W 15D 3000K 780 CW SO	60 Hz	60 W	12.5 W
929001110204	120V PAR30S 12.5W 25D 3000K 780 CW SO	60 Hz	75 W	12.5 W
929001110104	120V PAR30S 12.5W 15D 3000K 780 CW SOB	60 Hz	60 W	12.5 W
929001112204	120V PAR30S 12W 15D 2700K 900 D AF SO	60 Hz	75 W	12 W
929001112304	120V PAR30S 12W 15D 3000K 900 D AF SO	60 Hz	75 W	12 W
929001112504	120V PAR30S 12W 25D 2700K 900 D AF SO	60 Hz	75 W	12 W
929001112604	120V PAR30S 12W 25D 3000K 900 D AF SO	60 Hz	75 W	12 W
929001112704	120V PAR30S 12W 25D 4000K 900 D AF SO	60 Hz	75 W	12 W
929001112804	120V PAR30S 12W 35D 2700K 900 D AF SO	60 Hz	75 W	12 W
929001112904	120V PAR30S 12W 35D 3000K 900 D AF SO	60 Hz	75 W	12 W
929001113004	120V PAR30S 12W 35D 4000K 900 D AF SO	60 Hz	75 W	12 W
929001132304	120V PAR30L 12.7W 25D 2700K 900 D SO	60 Hz	75 W	12.7 W
929001132404	120V PAR30L 12.7W 25D 3000K 900 D SO	60 Hz	75 W	12.7 W
929001132504	120V PAR30L 12.7W 25D 4000K 900 D SO	60 Hz	75 W	12.7 W
929001132604	120V PAR30L 12.7W 35D 2700K 900 D SO	60 Hz	75 W	12.7 W
929001132704	120V PAR30L 12.7W 35D 3000K 900 D SO	60 Hz	75 W	12.7 W
929001132804	120V PAR30L 12.7W 35D 4000K 900 D SO	60 Hz	75 W	12.7 W
929001186304	12 PAR30S/F25 2700 DIM Black	60 Hz	75 W	12 W
929001193804	12 PAR30S/F25 3000 DIM Black	60 Hz	75 W	12 W
929001224704	120V PAR20 SO 6W 15D 2700K DIM	60 Hz	50 W	6 W
929001225004	120V PAR20 SO 6W 25D 2700K DIM	60 Hz	50 W	6 W
929001225104	120V PAR20 SO 6W 25D 3000K DIM	60 Hz	50 W	6 W
929001225204	120V PAR20 SO 6W 25D 4000K DIM	60 Hz	50 W	6 W

Order Code	Full Product Name	Input Frequency	Wattage Equivalent	Power (Rated) (Nom)
929001225304	120V PAR20 SO 6W 35D 2700K DIM	60 Hz	50 W	6 W
929001225404	120V PAR20 SO 6W 35D 3000K DIM	60 Hz	50 W	6 W
929001225504	120V PAR20 SO 6W 35D 4000K DIM	60 Hz	50 W	6 W
929001225904	120V PAR20 SO 6W 25D 2700K DIM Black	60 Hz	50 W	6 W
929001226004	120V PAR20 SO 6W 25D 3000K DIM Black	60 Hz	50 W	6 W
929001285604	12PAR30L/EXPERTCOLOR RETAIL/S10/930/DIM	60 Hz	75 W	12 W
929001285704	12PAR30L/EXPERTCOLOR RETAIL/F25/930/DIM	60 Hz	75 W	12 W
929001285804	12PAR30L/EXPERTCOLOR RETAIL/F40/930/DIM	60 Hz	75 W	12 W
929001285904	12PAR30S/EXPERTCOLOR RETAIL/S10/930/DIM	60 Hz	75 W	12 W
929001340404	12PAR30S/EXPERTCOLOR/ F40/927/DIM	60 Hz	75 W	12 W
929001340604	12PAR30S/EXPERTCOLOR/ F25/927/DIM B	60 Hz	75 W	12 W
929001341104	12PAR30L/EXPERTCOLOR/ F25/940/DIM	60 Hz	75 W	12 W
929001341204	12PAR30L/EXPERTCOLOR/ F40/940/DIM	60 Hz	75 W	12 W
929001286004	12PAR30S/EXPERTCOLOR RETAIL/F25/930/DIM	60 Hz	75 W	12 W
929001286104	12PAR30S/EXPERTCOLOR RETAIL/F40/930/DIM	60 Hz	75 W	12 W
929001340204	12PAR30S/EXPERTCOLOR/ S10/927/DIM	60 Hz	75 W	12 W
929001340904	12PAR30L/EXPERTCOLOR/ F25/927/DIM	60 Hz	75 W	12 W
929001341004	12PAR30L/EXPERTCOLOR/ F40/927/DIM	60 Hz	75 W	12 W
929001369704	12PAR30S/EXPERTCOLOR/ S10/940/DIM/120V	60 Hz	75 W	12 W
929001286204	12PAR30S/EXPERTCOLOR RETAIL/F25/930/DIMB	60 Hz	75 W	12 W
929001340304	12PAR30S/EXPERTCOLOR/ F25/927/DIM	60 Hz	75 W	12 W
929001294004	12PAR30L/AMB/F25/827/DIM ULW	50 to 60 Hz	75 W	12 W
929001294104	12PAR30L/AMB/F25/830/DIM ULW	50 to 60 Hz	75 W	12 W
929001294204	12PAR30L/AMB/F25/840/DIM ULW	50 to 60 Hz	75 W	12 W

PAR30/PAR20 LED

Order Code	Full Product Name	Input Frequency	Wattage Equivalent	Power (Rated) (Nom)
929001294404	12PAR30L/AMB/F40/827/DIM ULW	50 to 60 Hz	75 W	12 W
929001294504	12PAR30L/AMB/F40/830/DIM ULW	50 to 60 Hz	75 W	12 W
929001294604	12PAR30L/AMB/F40/840/DIM ULW	50 to 60 Hz	75 W	12 W
929001294804	12PAR30S/AMB/F25/827/DIM ULW	50 to 60 Hz	75 W	12 W
929001294904	12PAR30S/AMB/F25/830/DIM ULW	50 to 60 Hz	75 W	12 W
929001295004	12PAR30S/AMB/F25/840/DIM ULW	50 to 60 Hz	75 W	12 W
929001295204	12PAR30S/AMB/F40/827/DIM ULW	50 to 60 Hz	75 W	12 W
929001295304	12PAR30S/AMB/F40/830/DIM ULW	50 to 60 Hz	75 W	12 W
929001295404	12PAR30S/AMB/F40/840/DIM ULW	50 to 60 Hz	75 W	12 W

Order Code	Full Product Name	Input Frequency	Wattage Equivalent	Power (Rated) (Nom)
929001316504	7PAR20/LED/ F25/830/E26/GL/DIM 120V	60 Hz	50 W	7 W
929001316704	7PAR20/LED/ F25/840/E26/GL/DIM 120V	60 Hz	50 W	7 W
929001316904	7PAR20/LED/ F40/830/E26/GL/DIM 120V	60 Hz	50 W	7 W
929001317004	7PAR20/LED/ F40/840/E26/GL/DIM 120V	60 Hz	50 W	7 W
929001317204	7PAR20/LED/ F25/827-822/E26/GL/DIM 120V	60 Hz	50 W	7 W
929001317304	7PAR20/LED/ F40/827-822/E26/GL/DIM 120V	60 Hz	50 W	7 W
929001340704	12PAR30S/EXPERTCOLOR/ F25/940/DIM	60 Hz	75 W	12 W
929001340804	12PAR30S/EXPERTCOLOR/ F40/940/DIM	60 Hz	75 W	12 W

General Information

Order Code	Full Product Name	Nominal Lifetime (Nom)	Rated Lifetime (Hours)	Switching Cycle
929000257604	120V PAR30S 12W 35D 3500K 900 AF SO	50000 h	50000 h	20000X
929001110004	120V PAR30S 12.5W 15D 3000K 780 CW SO	50000 h	50000 h	20000X
929001110204	120V PAR30S 12.5W 25D 3000K 780 CW SO	50000 h	50000 h	20000X
929001110104	120V PAR30S 12.5W 15D 3000K 780 CW SOB	50000 h	50000 h	20000X
929001112204	120V PAR30S 12W 15D 2700K 900 D AF SO	25000 h	25000 h	50000X
929001112304	120V PAR30S 12W 15D 3000K 900 D AF SO	25000 h	25000 h	50000X
929001112504	120V PAR30S 12W 25D 2700K 900 D AF SO	25000 h	25000 h	50000X
929001112604	120V PAR30S 12W 25D 3000K 900 D AF SO	25000 h	25000 h	50000X
929001112704	120V PAR30S 12W 25D 4000K 900 D AF SO	25000 h	25000 h	50000X
929001112804	120V PAR30S 12W 35D 2700K 900 D AF SO	25000 h	25000 h	50000X
929001112904	120V PAR30S 12W 35D 3000K 900 D AF SO	25000 h	25000 h	50000X
929001113004	120V PAR30S 12W 35D 4000K 900 D AF SO	25000 h	25000 h	50000X
929001132304	120V PAR30L 12.7W 25D 2700K 900 D SO	25000 h	25000 h	50000X

Order Code	Full Product Name	Nominal Lifetime (Nom)	Rated Lifetime (Hours)	Switching Cycle
929001132404	120V PAR30L 12.7W 25D 3000K 900 D SO	25000 h	25000 h	50000X
929001132504	120V PAR30L 12.7W 25D 4000K 900 D SO	25000 h	25000 h	50000X
929001132604	120V PAR30L 12.7W 35D 2700K 900 D SO	25000 h	25000 h	50000X
929001132704	120V PAR30L 12.7W 35D 3000K 900 D SO	25000 h	25000 h	50000X
929001132804	120V PAR30L 12.7W 35D 4000K 900 D SO	25000 h	25000 h	50000X
929001186304	12 PAR30S/F25 2700 DIM Black	25000 h	25000 h	50000X
929001193804	12 PAR30S/F25 3000 DIM Black	25000 h	25000 h	50000X
929001224704	120V PAR20 SO 6W 15D 2700K DIM	25000 h	25000 h	50000X
929001225004	120V PAR20 SO 6W 25D 2700K DIM	25000 h	25000 h	50000X
929001225104	120V PAR20 SO 6W 25D 3000K DIM	25000 h	25000 h	50000X
929001225204	120V PAR20 SO 6W 25D 4000K DIM	25000 h	25000 h	50000X
929001225304	120V PAR20 SO 6W 35D 2700K DIM	25000 h	25000 h	50000X
929001225404	120V PAR20 SO 6W 35D 3000K DIM	25000 h	25000 h	50000X
929001225504	120V PAR20 SO 6W 35D 4000K DIM	25000 h	25000 h	50000X

PAR30/PAR20 LED

Order Code	Full Product Name	Nominal Lifetime (Nom)	Rated Lifetime (Hours)	Switching Cycle
929001225904	120V PAR20 SO 6W 25D 2700K DIM Black	25000 h	25000 h	50000X
929001226004	120V PAR20 SO 6W 25D 3000K DIM Black	25000 h	25000 h	50000X
929001285604	12PAR30L/EXPERTCOLOR RETAIL/S10/930/DIM	40000 h	40000 h	50000X
929001285704	12PAR30L/EXPERTCOLOR RETAIL/F25/930/DIM	40000 h	40000 h	50000X
929001285804	12PAR30L/EXPERTCOLOR RETAIL/F40/930/DIM	40000 h	40000 h	50000X
929001285904	12PAR30S/EXPERTCOLOR RETAIL/S10/930/DIM	40000 h	40000 h	50000X
929001340404	12PAR30S/EXPERTCOLOR/ F40/927/DIM	40000 h	40000 h	50000X
929001340604	12PAR30S/EXPERTCOLOR/ F25/927/DIM B	40000 h	40000 h	50000X
929001341104	12PAR30L/EXPERTCOLOR/ F25/940/DIM	40000 h	40000 h	50000X
929001341204	12PAR30L/EXPERTCOLOR/ F40/940/DIM	40000 h	40000 h	50000X
929001286004	12PAR30S/EXPERTCOLOR RETAIL/F25/930/DIM	40000 h	40000 h	50000X
929001286104	12PAR30S/EXPERTCOLOR RETAIL/F40/930/DIM	40000 h	40000 h	50000X
929001340204	12PAR30S/EXPERTCOLOR/ S10/927/DIM	40000 h	40000 h	50000X
929001340904	12PAR30L/EXPERTCOLOR/ F25/927/DIM	40000 h	40000 h	50000X
929001341004	12PAR30L/EXPERTCOLOR/ F40/927/DIM	40000 h	40000 h	50000X
929001369704	12PAR30S/EXPERTCOLOR/ S10/940/DIM/120V	40000 h	40000 h	50000X
929001286204	12PAR30S/EXPERTCOLOR RETAIL/F25/930/DIMB	40000 h	40000 h	50000X
929001340304	12PAR30S/EXPERTCOLOR/ F25/927/DIM	40000 h	40000 h	50000X
929001294004	12PAR30L/AMB/F25/827/DIM ULW	25000 h	25000 h	50000X

Order Code	Full Product Name	Nominal Lifetime (Nom)	Rated Lifetime (Hours)	Switching Cycle
929001294104	12PAR30L/AMB/F25/830/DIM ULW	25000 h	25000 h	50000X
929001294204	12PAR30L/AMB/F25/840/DIM ULW	25000 h	25000 h	50000X
929001294404	12PAR30L/AMB/F40/827/DIM ULW	25000 h	25000 h	50000X
929001294504	12PAR30L/AMB/F40/830/DIM ULW	25000 h	25000 h	50000X
929001294604	12PAR30L/AMB/F40/840/DIM ULW	25000 h	25000 h	50000X
929001294804	12PAR30S/AMB/F25/827/DIM ULW	25000 h	25000 h	50000X
929001294904	12PAR30S/AMB/F25/830/DIM ULW	25000 h	25000 h	50000X
929001295004	12PAR30S/AMB/F25/840/DIM ULW	25000 h	25000 h	50000X
929001295204	12PAR30S/AMB/F40/827/DIM ULW	25000 h	25000 h	50000X
929001295304	12PAR30S/AMB/F40/830/DIM ULW	25000 h	25000 h	50000X
929001295404	12PAR30S/AMB/F40/840/DIM ULW	25000 h	25000 h	50000X
929001316504	7PAR20/LED/ F25/830/E26/GL/DIM 120V	25000 h	25000 h	25000X
929001316704	7PAR20/LED/ F25/840/E26/GL/DIM 120V	25000 h	25000 h	25000X
929001316904	7PAR20/LED/ F40/830/E26/GL/DIM 120V	25000 h	25000 h	25000X
929001317004	7PAR20/LED/ F40/840/E26/GL/DIM 120V	25000 h	25000 h	25000X
929001317204	7PAR20/LED/ F25/827-822/E26/GL/DIM 120V	25000 h	25000 h	25000X
929001317304	7PAR20/LED/ F40/827-822/E26/GL/DIM 120V	25000 h	25000 h	25000X
929001340704	12PAR30S/EXPERTCOLOR/ F25/940/DIM	40000 h	40000 h	50000X
929001340804	12PAR30S/EXPERTCOLOR/ F40/940/DIM	40000 h	40000 h	50000X

Light Technical (1/2)

Order Code	Full Product Name	Beam Angle (Nom)	Correlated Color		Color		Luminous Flux (Nom)	Luminous Flux (Rated) (Nom)
			Color Code	Temperature (Nom)	Rendering Index (Nom)	Light Distribution		
929000257604	120V PAR30S 12W 35D 3500K 900 AF SO	36 °	835	3500 K	83	Medium beam 36°	950 lm	950 lm
929001110004	120V PAR30S 12.5W 15D 3000K 780 CW SO	15 °	830	3000 K	80	Narrow beam 15°	780 lm	780 lm
929001110204	120V PAR30S 12.5W 25D 3000K 780 CW SO	25 °	830	3000 K	80	Medium beam 25°	780 lm	780 lm

PAR30/PAR20 LED

Order Code	Full Product Name	Beam Angle (Nom)	Correlated Color		Color	Light Distribution	Luminous Flux (Nom)	Luminous Flux (Rated) (Nom)
			Color Code	Temperature (Nom)	Rendering Index (Nom)			
929001110104	120V PAR30S 12.5W 15D 3000K 780 CW SOB	15 °	830	3000 K	80	Narrow beam 15°	780 lm	780 lm
929001112204	120V PAR30S 12W 15D 2700K 900 D AF SO	15 °	827	2700 K	80	-	850 lm	850 lm
929001112304	120V PAR30S 12W 15D 3000K 900 D AF SO	15 °	830	3000 K	80	-	900 lm	900 lm
929001112504	120V PAR30S 12W 25D 2700K 900 D AF SO	25 °	827	2700 K	80	-	850 lm	850 lm
929001112604	120V PAR30S 12W 25D 3000K 900 D AF SO	25 °	830	3000 K	80	-	900 lm	900 lm
929001112704	120V PAR30S 12W 25D 4000K 900 D AF SO	25 °	840	4000 K	80	-	950 lm	950 lm
929001112804	120V PAR30S 12W 35D 2700K 900 D AF SO	35 °	827	2700 K	80	-	850 lm	850 lm
929001112904	120V PAR30S 12W 35D 3000K 900 D AF SO	35 °	830	3000 K	80	-	900 lm	900 lm
929001113004	120V PAR30S 12W 35D 4000K 900 D AF SO	35 °	840	4000 K	80	-	950 lm	950 lm
929001132304	120V PAR30L 12.7W 25D 2700K 900 D SO	25 °	827	2700 K	80	-	850 lm	850 lm
929001132404	120V PAR30L 12.7W 25D 3000K 900 D SO	25 °	830	3000 K	80	-	900 lm	900 lm
929001132504	120V PAR30L 12.7W 25D 4000K 900 D SO	25 °	840	4000 K	80	-	950 lm	950 lm
929001132604	120V PAR30L 12.7W 35D 2700K 900 D SO	35 °	827	2700 K	80	-	850 lm	850 lm
929001132704	120V PAR30L 12.7W 35D 3000K 900 D SO	35 °	830	3000 K	80	-	900 lm	900 lm
929001132804	120V PAR30L 12.7W 35D 4000K 900 D SO	35 °	840	4000 K	80	-	950 lm	950 lm
929001186304	12 PAR30S/F25 2700 DIM Black	25 °	827	2700 K	80	-	850 lm	850 lm
929001193804	12 PAR30S/F25 3000 DIM Black	25 °	830	3000 K	80	-	900 lm	900 lm
929001224704	120V PAR20 SO 6W 15D 2700K DIM	15 °	827	2700 K	80	-	480 lm	480 lm
929001225004	120V PAR20 SO 6W 25D 2700K DIM	25 °	827	2700 K	80	-	480 lm	480 lm
929001225104	120V PAR20 SO 6W 25D 3000K DIM	25 °	830	3000 K	80	-	500 lm	500 lm
929001225204	120V PAR20 SO 6W 25D 4000K DIM	25 °	840	4000 K	80	-	520 lm	520 lm
929001225304	120V PAR20 SO 6W 35D 2700K DIM	35 °	827	2700 K	80	-	480 lm	480 lm
929001225404	120V PAR20 SO 6W 35D 3000K DIM	35 °	830	3000 K	80	-	500 lm	500 lm
929001225504	120V PAR20 SO 6W 35D 4000K DIM	35 °	840	4000 K	80	-	520 lm	520 lm
929001225904	120V PAR20 SO 6W 25D 2700K DIM Black	25 °	827	2700 K	80	-	480 lm	480 lm
929001226004	120V PAR20 SO 6W 25D 3000K DIM Black	25 °	830	3000 K	80	-	500 lm	500 lm
929001285604	12PAR30L/EXPERTCOLOR RETAIL/ S10/930/DIM	10 °	930	3000 K	90	-	880 lm	880 lm
929001285704	12PAR30L/EXPERTCOLOR RETAIL/ F25/930/DIM	25 °	930	3000 K	90	-	880 lm	880 lm
929001285804	12PAR30L/EXPERTCOLOR RETAIL/ F40/930/DIM	40 °	930	3000 K	90	-	880 lm	880 lm
929001285904	12PAR30S/EXPERTCOLOR RETAIL/ S10/930/DIM	10 °	930	3000 K	90	-	880 lm	880 lm
929001340404	12PAR30S/EXPERTCOLOR/F40/927/DIM	40 °	927	2700 K	95	-	850 lm	850 lm
929001340604	12PAR30S/EXPERTCOLOR/F25/927/DIM B	25 °	927	2700 K	95	-	850 lm	850 lm
929001341104	12PAR30L/EXPERTCOLOR/F25/940/DIM	25 °	940	4000 K	95	-	950 lm	950 lm
929001341204	12PAR30L/EXPERTCOLOR/F40/940/DIM	40 °	940	4000 K	95	-	950 lm	950 lm
929001286004	12PAR30S/EXPERTCOLOR RETAIL/ F25/930/DIM	25 °	930	3000 K	90	-	880 lm	880 lm
929001286104	12PAR30S/EXPERTCOLOR RETAIL/ F40/930/DIM	40 °	930	3000 K	90	-	880 lm	880 lm
929001340204	12PAR30S/EXPERTCOLOR/S10/927/DIM	10 °	927	2700 K	95	-	850 lm	850 lm
929001340904	12PAR30L/EXPERTCOLOR/F25/927/DIM	25 °	927	2700 K	95	-	850 lm	850 lm
929001341004	12PAR30L/EXPERTCOLOR/F40/927/DIM	40 °	927	2700 K	95	-	850 lm	850 lm
929001369704	12PAR30S/EXPERTCOLOR/S10/940/DIM/ 120V	10 °	940	4000 K	95	-	950 lm	950 lm
929001286204	12PAR30S/EXPERTCOLOR RETAIL/F25/930/ DIMB	25 °	930	3000 K	90	-	880 lm	880 lm

PAR30/PAR20 LED

Order Code	Full Product Name	Beam Angle (Nom)	Correlated Color		Color		Luminous Flux (Nom)	Luminous Flux (Rated) (Nom)
			Color Code	Temperature (Nom)	Rendering Index (Nom)	Light Distribution		
929001340304	12PAR30S/EXPERTCOLOR/F25/927/DIM	25 °	927	2700 K	95	-	850 lm	850 lm
929001294004	12PAR30L/AMB/F25/827/DIM ULW	25 °	827	2700 K	80	-	850 lm	850 lm
929001294104	12PAR30L/AMB/F25/830/DIM ULW	25 °	830	3000 K	80	-	850 lm	850 lm
929001294204	12PAR30L/AMB/F25/840/DIM ULW	25 °	840	4000 K	80	-	850 lm	850 lm
929001294404	12PAR30L/AMB/F40/827/DIM ULW	40 °	827	2700 K	80	-	850 lm	850 lm
929001294504	12PAR30L/AMB/F40/830/DIM ULW	40 °	830	3000 K	80	-	850 lm	850 lm
929001294604	12PAR30L/AMB/F40/840/DIM ULW	40 °	840	4000 K	80	-	850 lm	850 lm
929001294804	12PAR30S/AMB/F25/827/DIM ULW	25 °	827	2700 K	80	-	850 lm	850 lm
929001294904	12PAR30S/AMB/F25/830/DIM ULW	25 °	830	3000 K	80	-	850 lm	850 lm
929001295004	12PAR30S/AMB/F25/840/DIM ULW	25 °	840	4000 K	80	-	850 lm	850 lm
929001295204	12PAR30S/AMB/F40/827/DIM ULW	40 °	827	2700 K	80	-	850 lm	850 lm
929001295304	12PAR30S/AMB/F40/830/DIM ULW	40 °	830	3000 K	80	-	850 lm	850 lm
929001295404	12PAR30S/AMB/F40/840/DIM ULW	40 °	840	4000 K	80	-	850 lm	850 lm
929001316504	7PAR20/LED/F25/830/E26/GL/DIM 120V	25 °	830	3000 K	80	-	500 lm	500 lm
929001316704	7PAR20/LED/F25/840/E26/GL/DIM 120V	25 °	840	4000 K	80	-	500 lm	500 lm
929001316904	7PAR20/LED/F40/830/E26/GL/DIM 120V	40 °	830	3000 K	80	-	500 lm	500 lm
929001317004	7PAR20/LED/F40/840/E26/GL/DIM 120V	40 °	840	4000 K	80	-	500 lm	500 lm
929001317204	7PAR20/LED/F25/827-822/E26/GL/DIM 120V	25 °	822-827	2200-2700 K	80	-	500 lm	500 lm
929001317304	7PAR20/LED/F40/827-822/E26/GL/DIM 120V	40 °	822-827	2200-2700 K	80	-	500 lm	500 lm
929001340704	12PAR30S/EXPERTCOLOR/F25/940/DIM	25 °	940	4000 K	95	-	950 lm	950 lm
929001340804	12PAR30S/EXPERTCOLOR/F40/940/DIM	40 °	940	4000 K	95	-	950 lm	950 lm

Light Technical (2/2)

Order Code	Full Product Name	Luminous Intensity (Nom)	Rated Beam Angle	Order Code	Full Product Name	Luminous Intensity (Nom)	Rated Beam Angle
929000257604	120V PAR30S 12W 35D 3500K 900 AF SO	2700 cd	36 °	929001132304	120V PAR30L 12.7W 25D 2700K 900 D SO	4700 cd	25 °
929001110004	120V PAR30S 12.5W 15D 3000K 780 CW SO	6300 cd	15 °	929001132404	120V PAR30L 12.7W 25D 3000K 900 D SO	5000 cd	25 °
929001110204	120V PAR30S 12.5W 25D 3000K 780 CW SO	3500 cd	25 °	929001132504	120V PAR30L 12.7W 25D 4000K 900 D SO	5200 cd	25 °
929001110104	120V PAR30S 12.5W 15D 3000K 780 CW SOB	6300 cd	15 °	929001132604	120V PAR30L 12.7W 35D 2700K 900 D SO	2300 cd	35 °
929001112204	120V PAR30S 12W 15D 2700K 900 D AF SO	7400 cd	15 °	929001132704	120V PAR30L 12.7W 35D 3000K 900 D SO	2400 cd	35 °
929001112304	120V PAR30S 12W 15D 3000K 900 D AF SO	7900 cd	15 °	929001132804	120V PAR30L 12.7W 35D 4000K 900 D SO	2600 cd	35 °
929001112504	120V PAR30S 12W 25D 2700K 900 D AF SO	5000 cd	25 °	929001186304	12 PAR30S/F25 2700 DIM Black	5000 cd	25 °
929001112604	120V PAR30S 12W 25D 3000K 900 D AF SO	5300 cd	25 °	929001193804	12 PAR30S/F25 3000 DIM Black	5300 cd	25 °
929001112704	120V PAR30S 12W 25D 4000K 900 D AF SO	5500 cd	25 °	929001224704	120V PAR20 SO 6W 15D 2700K DIM	2800 cd	15 °
929001112804	120V PAR30S 12W 35D 2700K 900 D AF SO	2400 cd	35 °	929001225004	120V PAR20 SO 6W 25D 2700K DIM	1800 cd	25 °
929001112904	120V PAR30S 12W 35D 3000K 900 D AF SO	2500 cd	35 °	929001225104	120V PAR20 SO 6W 25D 3000K DIM	1850 cd	25 °
929001113004	120V PAR30S 12W 35D 4000K 900 D AF SO	2700 cd	35 °	929001225204	120V PAR20 SO 6W 25D 4000K DIM	1900 cd	25 °
				929001225304	120V PAR20 SO 6W 35D 2700K DIM	1000 cd	35 °
				929001225404	120V PAR20 SO 6W 35D 3000K DIM	1050 cd	35 °
				929001225504	120V PAR20 SO 6W 35D 4000K DIM	1080 cd	35 °
				929001225904	120V PAR20 SO 6W 25D 2700K DIM Black	1800 cd	25 °

PAR30/PAR20 LED

Order Code	Full Product Name	Luminous Intensity (Nom)	Rated Beam Angle
929001226004	120V PAR20 SO 6W 25D 3000K DIM Black	1850 cd	25 °
929001285604	12PAR30L/EXPERTCOLOR RETAIL/ S10/930/DIM	10000 cd	10 °
929001285704	12PAR30L/EXPERTCOLOR RETAIL/ F25/930/DIM	4500 cd	25 °
929001285804	12PAR30L/EXPERTCOLOR RETAIL/ F40/930/DIM	2000 cd	40 °
929001285904	12PAR30S/EXPERTCOLOR RETAIL/ S10/930/DIM	10000 cd	10 °
929001340404	12PAR30S/EXPERTCOLOR/F40/927/DIM	1800 cd	40 °
929001340604	12PAR30S/EXPERTCOLOR/F25/927/DIM B	4200 cd	25 °
929001341104	12PAR30L/EXPERTCOLOR/F25/940/DIM	4800 cd	25 °
929001341204	12PAR30L/EXPERTCOLOR/F40/940/DIM	2100 cd	40 °
929001286004	12PAR30S/EXPERTCOLOR RETAIL/ F25/930/DIM	4500 cd	25 °
929001286104	12PAR30S/EXPERTCOLOR RETAIL/ F40/930/DIM	2000 cd	40 °
929001340204	12PAR30S/EXPERTCOLOR/S10/927/DIM	10000 cd	10 °
929001340904	12PAR30L/EXPERTCOLOR/F25/927/DIM	4200 cd	25 °
929001341004	12PAR30L/EXPERTCOLOR/F40/927/DIM	1800 cd	40 °
929001369704	12PAR30S/EXPERTCOLOR/S10/940/DIM/ 120V	10500 cd	10 °
929001286204	12PAR30S/EXPERTCOLOR RETAIL/ F25/930/DIMB	4500 cd	25 °

Order Code	Full Product Name	Luminous Intensity (Nom)	Rated Beam Angle
929001340304	12PAR30S/EXPERTCOLOR/F25/927/DIM	4200 cd	25 °
929001294004	12PAR30L/AMB/F25/827/DIM ULW	3300 cd	25 °
929001294104	12PAR30L/AMB/F25/830/DIM ULW	3300 cd	25 °
929001294204	12PAR30L/AMB/F25/840/DIM ULW	3300 cd	25 °
929001294404	12PAR30L/AMB/F40/827/DIM ULW	1500 cd	40 °
929001294504	12PAR30L/AMB/F40/830/DIM ULW	1500 cd	40 °
929001294604	12PAR30L/AMB/F40/840/DIM ULW	1500 cd	40 °
929001294804	12PAR30S/AMB/F25/827/DIM ULW	3300 cd	25 °
929001294904	12PAR30S/AMB/F25/830/DIM ULW	3300 cd	25 °
929001295004	12PAR30S/AMB/F25/840/DIM ULW	3300 cd	25 °
929001295204	12PAR30S/AMB/F40/827/DIM ULW	1500 cd	40 °
929001295304	12PAR30S/AMB/F40/830/DIM ULW	1500 cd	40 °
929001295404	12PAR30S/AMB/F40/840/DIM ULW	1500 cd	40 °
929001316504	7PAR20/LED/F25/830/E26/GL/DIM 120V	1500 cd	25 °
929001316704	7PAR20/LED/F25/840/E26/GL/DIM 120V	1500 cd	25 °
929001316904	7PAR20/LED/F40/830/E26/GL/DIM 120V	1000 cd	40 °
929001317004	7PAR20/LED/F40/840/E26/GL/DIM 120V	1000 cd	40 °
929001317204	7PAR20/LED/F25/827-822/E26/GL/DIM 120V	1300 cd	25 °
929001317304	7PAR20/LED/F40/827-822/E26/GL/DIM 120V	800 cd	40 °
929001340704	12PAR30S/EXPERTCOLOR/F25/940/DIM	4800 cd	25 °
929001340804	12PAR30S/EXPERTCOLOR/F40/940/DIM	2100 cd	40 °

Mechanical and Housing

Order Code	Full Product Name	Bulb Shape
929000257604	120V PAR30S 12W 35D 3500K 900 AF SO	PAR30S
929001110004	120V PAR30S 12.5W 15D 3000K 780 CW SO	PAR30S
929001110204	120V PAR30S 12.5W 25D 3000K 780 CW SO	PAR30S
929001110104	120V PAR30S 12.5W 15D 3000K 780 CW SOB	PAR30S
929001112204	120V PAR30S 12W 15D 2700K 900 D AF SO	PAR30S
929001112304	120V PAR30S 12W 15D 3000K 900 D AF SO	PAR30S
929001112504	120V PAR30S 12W 25D 2700K 900 D AF SO	PAR30S
929001112604	120V PAR30S 12W 25D 3000K 900 D AF SO	PAR30S
929001112704	120V PAR30S 12W 25D 4000K 900 D AF SO	PAR30S
929001112804	120V PAR30S 12W 35D 2700K 900 D AF SO	PAR30S
929001112904	120V PAR30S 12W 35D 3000K 900 D AF SO	PAR30S
929001113004	120V PAR30S 12W 35D 4000K 900 D AF SO	PAR30S
929001132304	120V PAR30L 12.7W 25D 2700K 900 D SO	PAR30L
929001132404	120V PAR30L 12.7W 25D 3000K 900 D SO	PAR30L
929001132504	120V PAR30L 12.7W 25D 4000K 900 D SO	PAR30L
929001132604	120V PAR30L 12.7W 35D 2700K 900 D SO	PAR30L
929001132704	120V PAR30L 12.7W 35D 3000K 900 D SO	PAR30L
929001132804	120V PAR30L 12.7W 35D 4000K 900 D SO	PAR30L
929001186304	12 PAR30S/F25 2700 DIM Black	PAR30S
929001193804	12 PAR30S/F25 3000 DIM Black	PAR30S
929001224704	120V PAR20 SO 6W 15D 2700K DIM	PAR20

Order Code	Full Product Name	Bulb Shape
929001225004	120V PAR20 SO 6W 25D 2700K DIM	PAR20
929001225104	120V PAR20 SO 6W 25D 3000K DIM	PAR20
929001225204	120V PAR20 SO 6W 25D 4000K DIM	PAR20
929001225304	120V PAR20 SO 6W 35D 2700K DIM	PAR20
929001225404	120V PAR20 SO 6W 35D 3000K DIM	PAR20
929001225504	120V PAR20 SO 6W 35D 4000K DIM	PAR20
929001225904	120V PAR20 SO 6W 25D 2700K DIM Black	PAR20
929001226004	120V PAR20 SO 6W 25D 3000K DIM Black	PAR20
929001285604	12PAR30L/EXPERTCOLOR RETAIL/S10/930/DIM	Others
929001285704	12PAR30L/EXPERTCOLOR RETAIL/F25/930/DIM	Others
929001285804	12PAR30L/EXPERTCOLOR RETAIL/F40/930/DIM	Others
929001285904	12PAR30S/EXPERTCOLOR RETAIL/S10/930/DIM	PAR30S
929001340404	12PAR30S/EXPERTCOLOR/F40/927/DIM	PAR30S
929001340604	12PAR30S/EXPERTCOLOR/F25/927/DIM B	PAR30S
929001341104	12PAR30L/EXPERTCOLOR/F25/940/DIM	PAR30L
929001341204	12PAR30L/EXPERTCOLOR/F40/940/DIM	PAR30L
929001286004	12PAR30S/EXPERTCOLOR RETAIL/F25/930/DIM	PAR30S
929001286104	12PAR30S/EXPERTCOLOR RETAIL/F40/930/DIM	PAR30S
929001340204	12PAR30S/EXPERTCOLOR/S10/927/DIM	PAR30S
929001340904	12PAR30L/EXPERTCOLOR/F25/927/DIM	PAR30L
929001341004	12PAR30L/EXPERTCOLOR/F40/927/DIM	PAR30L

PAR30/PAR20 LED

Order Code	Full Product Name	Bulb Shape
929001369704	12PAR30S/EXPERTCOLOR/S10/940/DIM/120V	PAR30S
929001286204	12PAR30S/EXPERTCOLOR RETAIL/F25/930/DIMB	PAR30S
929001340304	12PAR30S/EXPERTCOLOR/F25/927/DIM	PAR30S
929001294004	12PAR30L/AMB/F25/827/DIM ULW	PAR30L
929001294104	12PAR30L/AMB/F25/830/DIM ULW	PAR30L
929001294204	12PAR30L/AMB/F25/840/DIM ULW	PAR30L
929001294404	12PAR30L/AMB/F40/827/DIM ULW	PAR30L
929001294504	12PAR30L/AMB/F40/830/DIM ULW	PAR30L
929001294604	12PAR30L/AMB/F40/840/DIM ULW	PAR30L
929001294804	12PAR30S/AMB/F25/827/DIM ULW	PAR30S
929001294904	12PAR30S/AMB/F25/830/DIM ULW	PAR30S
929001295004	12PAR30S/AMB/F25/840/DIM ULW	PAR30S


Order Code	Full Product Name	Bulb Shape
929001295204	12PAR30S/AMB/F40/827/DIM ULW	PAR30S
929001295304	12PAR30S/AMB/F40/830/DIM ULW	PAR30S
929001295404	12PAR30S/AMB/F40/840/DIM ULW	PAR30S
929001316504	7PAR20/LED/F25/830/E26/GL/DIM 120V	PAR20
929001316704	7PAR20/LED/F25/840/E26/GL/DIM 120V	PAR20
929001316904	7PAR20/LED/F40/830/E26/GL/DIM 120V	PAR20
929001317004	7PAR20/LED/F40/840/E26/GL/DIM 120V	PAR20
929001317204	7PAR20/LED/F25/827-822/E26/GL/DIM 120V	PAR20
929001317304	7PAR20/LED/F40/827-822/E26/GL/DIM 120V	PAR20
929001340704	12PAR30S/EXPERTCOLOR/F25/940/DIM	PAR30S
929001340804	12PAR30S/EXPERTCOLOR/F40/940/DIM	PAR30S

Temperature


Order Code	Full Product Name	T-Case Maximum (Nom)
929000257604	120V PAR30S 12W 35D 3500K 900 AF SO	-
929001110004	120V PAR30S 12.5W 15D 3000K 780 CW SO	-
929001110204	120V PAR30S 12.5W 25D 3000K 780 CW SO	-
929001110104	120V PAR30S 12.5W 15D 3000K 780 CW SOB	-
929001112204	120V PAR30S 12W 15D 2700K 900 D AF SO	89 °C
929001112304	120V PAR30S 12W 15D 3000K 900 D AF SO	89 °C
929001112504	120V PAR30S 12W 25D 2700K 900 D AF SO	89 °C
929001112604	120V PAR30S 12W 25D 3000K 900 D AF SO	89 °C
929001112704	120V PAR30S 12W 25D 4000K 900 D AF SO	89 °C
929001112804	120V PAR30S 12W 35D 2700K 900 D AF SO	89 °C
929001112904	120V PAR30S 12W 35D 3000K 900 D AF SO	89 °C
929001113004	120V PAR30S 12W 35D 4000K 900 D AF SO	89 °C
929001132304	120V PAR30L 12.7W 25D 2700K 900 D SO	89 °C
929001132404	120V PAR30L 12.7W 25D 3000K 900 D SO	89 °C
929001132504	120V PAR30L 12.7W 25D 4000K 900 D SO	89 °C
929001132604	120V PAR30L 12.7W 35D 2700K 900 D SO	89 °C
929001132704	120V PAR30L 12.7W 35D 3000K 900 D SO	89 °C
929001132804	120V PAR30L 12.7W 35D 4000K 900 D SO	89 °C
929001186304	12 PAR30S/F25 2700 DIM Black	89 °C
929001193804	12 PAR30S/F25 3000 DIM Black	89 °C
929001224704	120V PAR20 SO 6W 15D 2700K DIM	85 °C
929001225004	120V PAR20 SO 6W 25D 2700K DIM	85 °C
929001225104	120V PAR20 SO 6W 25D 3000K DIM	85 °C
929001225204	120V PAR20 SO 6W 25D 4000K DIM	85 °C
929001225304	120V PAR20 SO 6W 35D 2700K DIM	85 °C
929001225404	120V PAR20 SO 6W 35D 3000K DIM	85 °C
929001225504	120V PAR20 SO 6W 35D 4000K DIM	85 °C
929001225904	120V PAR20 SO 6W 25D 2700K DIM Black	85 °C
929001226004	120V PAR20 SO 6W 25D 3000K DIM Black	85 °C
929001285604	12PAR30L/EXPERTCOLOR RETAIL/S10/930/DIM	85 °C
929001285704	12PAR30L/EXPERTCOLOR RETAIL/F25/930/DIM	85 °C
929001285804	12PAR30L/EXPERTCOLOR RETAIL/F40/930/DIM	85 °C
929001285904	12PAR30S/EXPERTCOLOR RETAIL/S10/930/DIM	90 °C

Order Code	Full Product Name	T-Case Maximum (Nom)
929001340404	12PAR30S/EXPERTCOLOR/F40/927/DIM	90 °C
929001340604	12PAR30S/EXPERTCOLOR/F25/927/DIM B	90 °C
929001341104	12PAR30L/EXPERTCOLOR/F25/940/DIM	85 °C
929001341204	12PAR30L/EXPERTCOLOR/F40/940/DIM	85 °C
929001286004	12PAR30S/EXPERTCOLOR RETAIL/F25/930/DIM	90 °C
929001286104	12PAR30S/EXPERTCOLOR RETAIL/F40/930/DIM	90 °C
929001340204	12PAR30S/EXPERTCOLOR/S10/927/DIM	90 °C
929001340904	12PAR30L/EXPERTCOLOR/F25/927/DIM	85 °C
929001341004	12PAR30L/EXPERTCOLOR/F40/927/DIM	85 °C
929001369704	12PAR30S/EXPERTCOLOR/S10/940/DIM/120V	90 °C
929001286204	12PAR30S/EXPERTCOLOR RETAIL/F25/930/DIMB	90 °C
929001340304	12PAR30S/EXPERTCOLOR/F25/927/DIM	90 °C
929001294004	12PAR30L/AMB/F25/827/DIM ULW	85 °C
929001294104	12PAR30L/AMB/F25/830/DIM ULW	85 °C
929001294204	12PAR30L/AMB/F25/840/DIM ULW	85 °C
929001294404	12PAR30L/AMB/F40/827/DIM ULW	85 °C
929001294504	12PAR30L/AMB/F40/830/DIM ULW	85 °C
929001294604	12PAR30L/AMB/F40/840/DIM ULW	85 °C
929001294804	12PAR30S/AMB/F25/827/DIM ULW	85 °C
929001294904	12PAR30S/AMB/F25/830/DIM ULW	85 °C
929001295004	12PAR30S/AMB/F25/840/DIM ULW	85 °C
929001295204	12PAR30S/AMB/F40/827/DIM ULW	85 °C
929001295304	12PAR30S/AMB/F40/830/DIM ULW	85 °C
929001295404	12PAR30S/AMB/F40/840/DIM ULW	85 °C
929001316504	7PAR20/LED/F25/830/E26/GL/DIM 120V	90 °C
929001316704	7PAR20/LED/F25/840/E26/GL/DIM 120V	90 °C
929001316904	7PAR20/LED/F40/830/E26/GL/DIM 120V	90 °C
929001317004	7PAR20/LED/F40/840/E26/GL/DIM 120V	90 °C
929001317204	7PAR20/LED/F25/827-822/E26/GL/DIM 120V	82 °C
929001317304	7PAR20/LED/F40/827-822/E26/GL/DIM 120V	82 °C
929001340704	12PAR30S/EXPERTCOLOR/F25/940/DIM	90 °C
929001340804	12PAR30S/EXPERTCOLOR/F40/940/DIM	90 °C


Light Distribution Diagrams

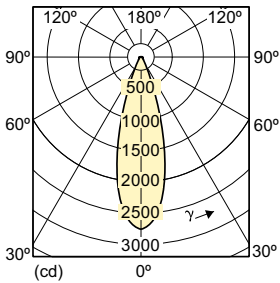










12 W E26 3500 K PAR30S 36D















12.5 W E26 3000 K PAR30S 15D

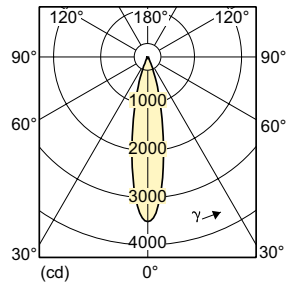




12.5 W E26 3000 K PAR30S 25D






Light Distribution Diagrams



Light Distribution Diagrams






PAR30L 120V 12-75W 900lm 10D 3000K E26 D



PAR30L 120V 12-75W 900lm 25D 3000K E26 D

PAR30L 120V 12-75W 900lm 40D 3000K E26 D




PAR30S 120V 12-75W 900lm 10D 3000K E26 D















PAR30S 120V 12-75W 25D 3000K E26 D WH

PAR30S 120V 12-75W 900lm 40D 3000K E26 D

PAR30S 120V 12-75W 25D 3000K E26 D BL



Light Distribution Diagrams

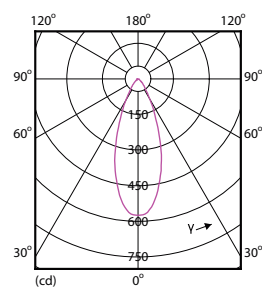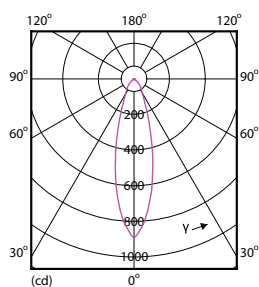


LEDspot PAR20 7W 830 500lm 25D


LEDspot PAR20 7W 840 500lm 25D

LEDspot PAR20 7W 830 500lm 40D


Light Distribution Diagrams

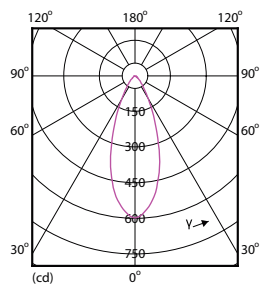


LEDspot PAR20 7W 840 500lm 40D

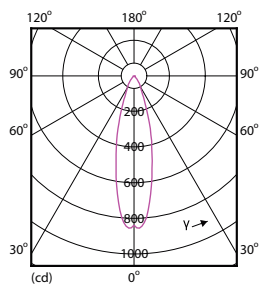


LEDspot PAR20 7W 822 827 500lm 25D

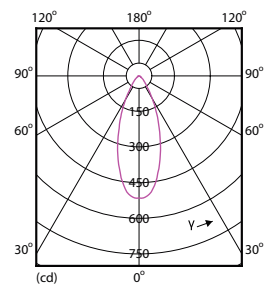


LEDspot PAR20 7W 822 827 500lm 40D

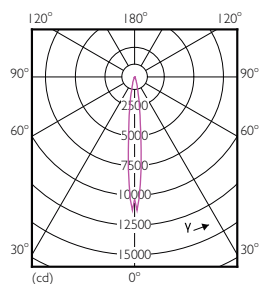


PAR30S 12W 850lm 10D 2700K E26

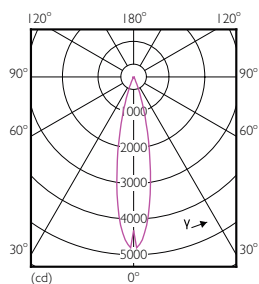


PAR30S 12W 850lm 25D 2700K E26

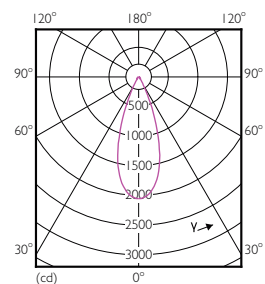


PAR30S 12W 850lm 40D 2700K E26

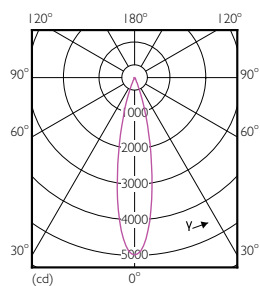


PAR30S 12W 950lm 25D 2700K E26

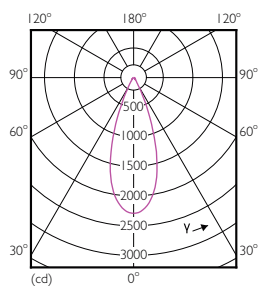


PAR30S 12W 950lm 40D 2700K E26

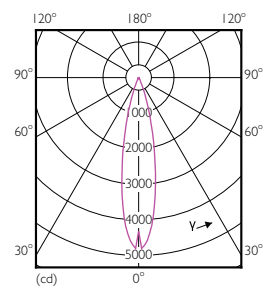


PAR30L 12W 850lm 25D 2700K E26

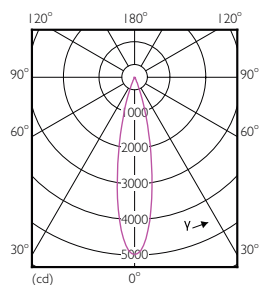

PAR30L 12W 850lm 40D 2700K E26

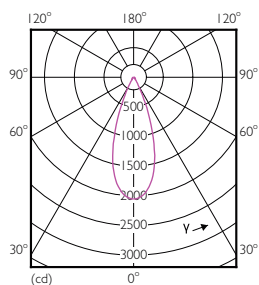


PAR30L 12W 950lm 25D 4000K E26

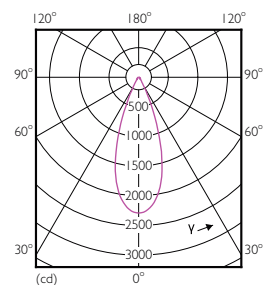










PAR30L 12W 950lm 40D 4000K E26

Light Distribution Diagrams















PAR30S 12W 950lm 10D 4000K E26













Accent Diagrams















Accent Diagrams















Accent Diagrams







Accent Diagrams









Accent Diagrams















Accent Diagrams















Beam Diagrams

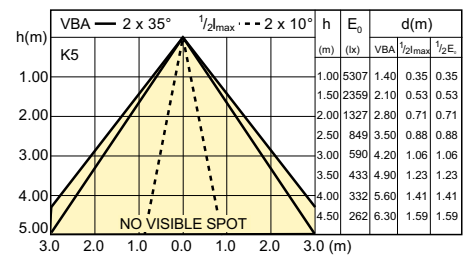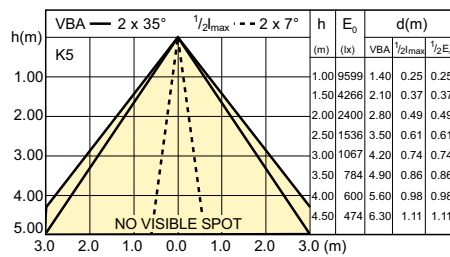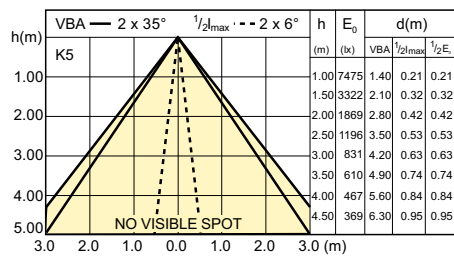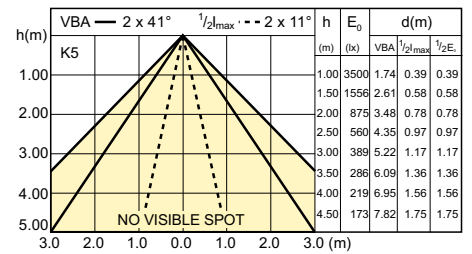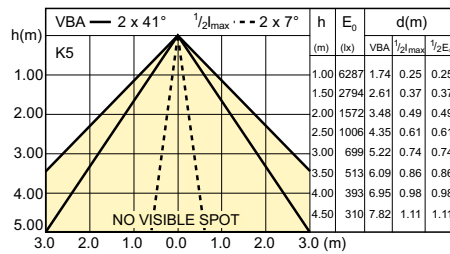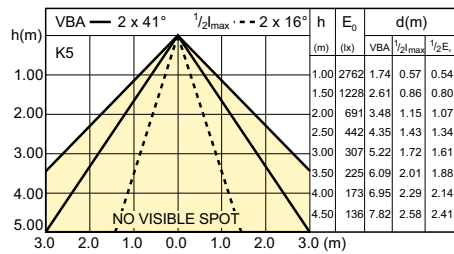













Beam Diagrams

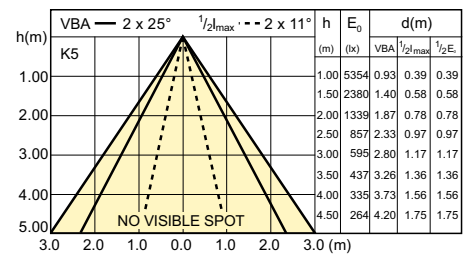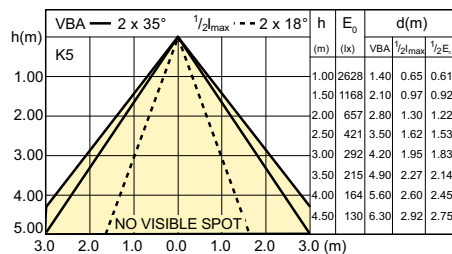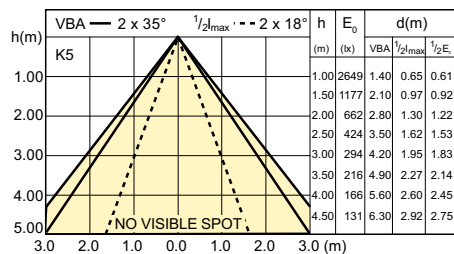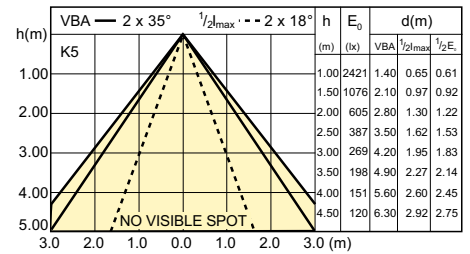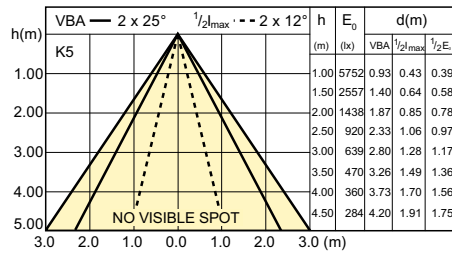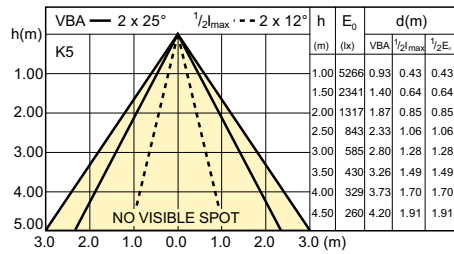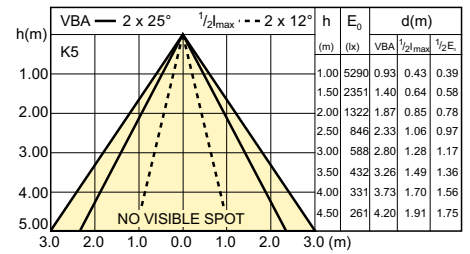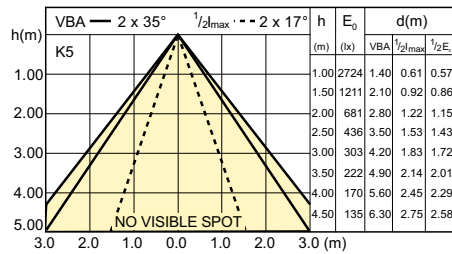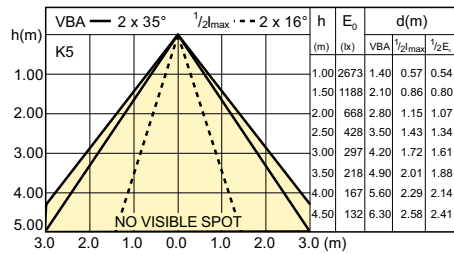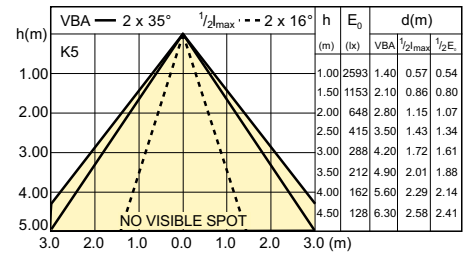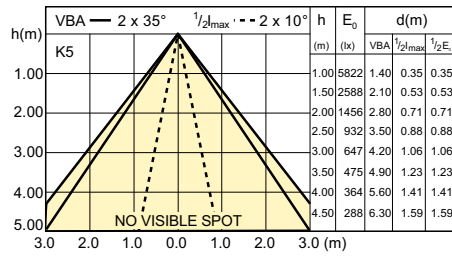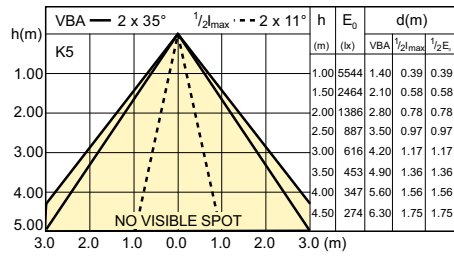

Beam Diagrams

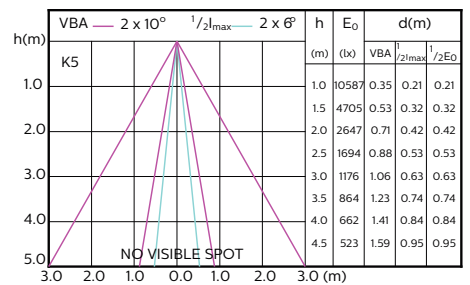
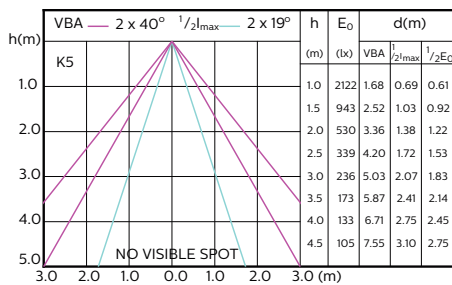
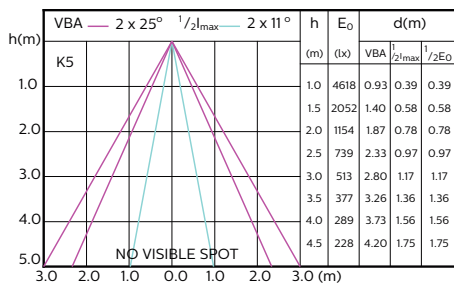
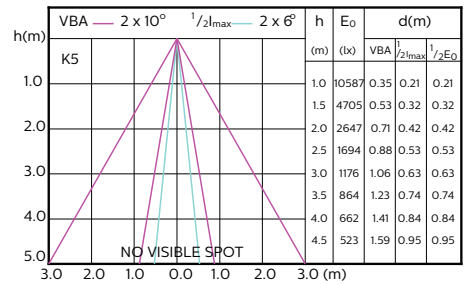
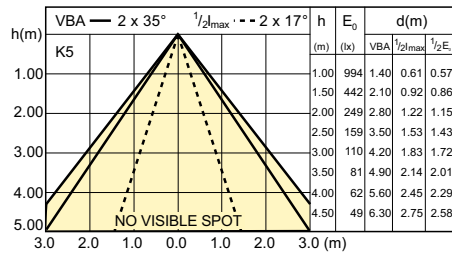
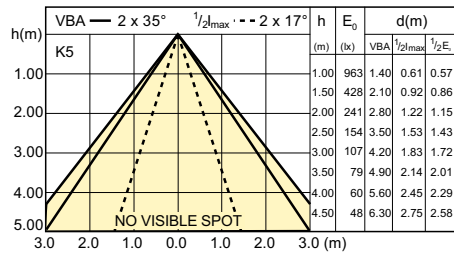
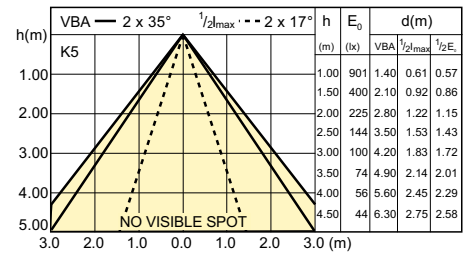
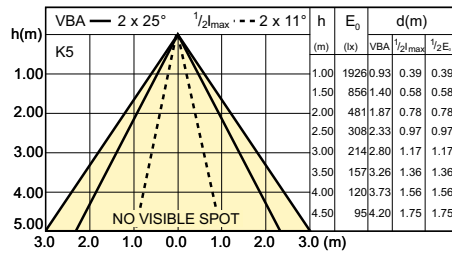
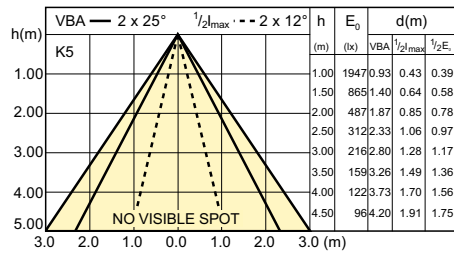
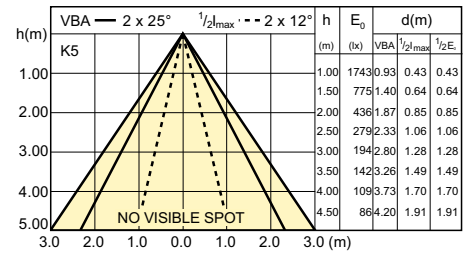
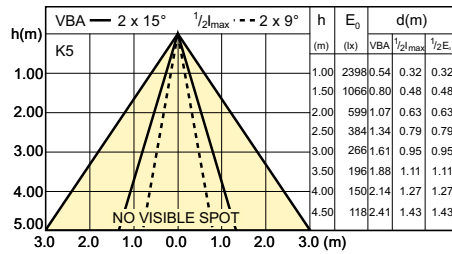
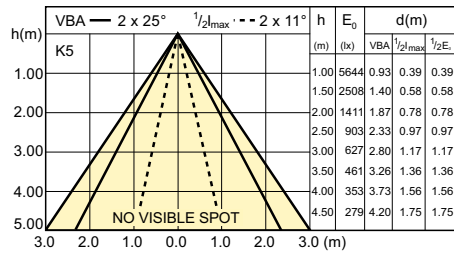


Beam Diagrams

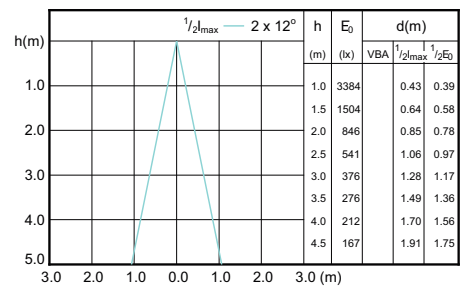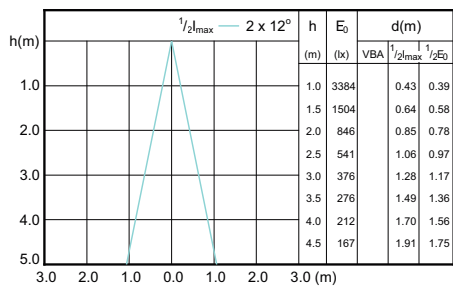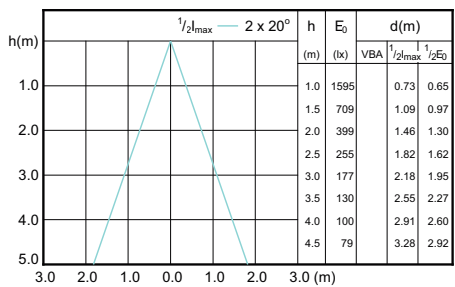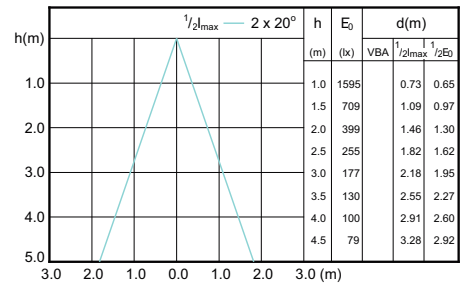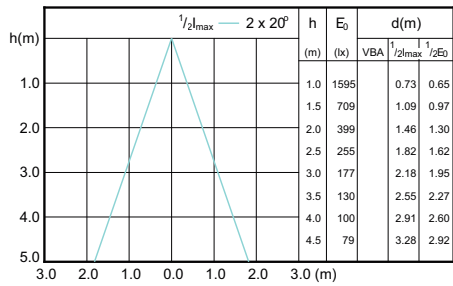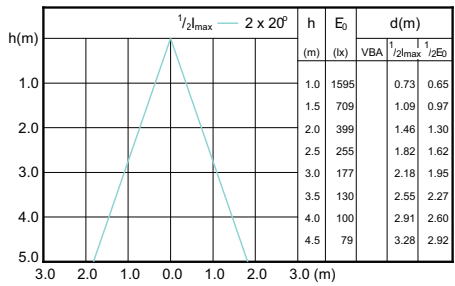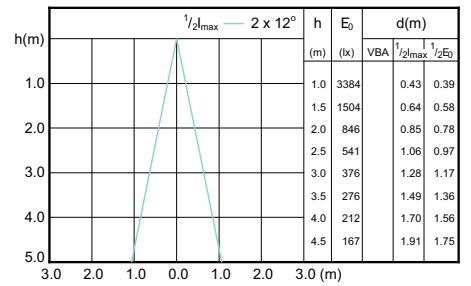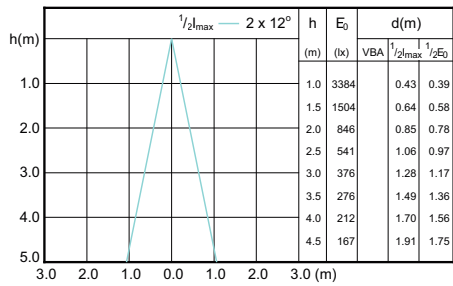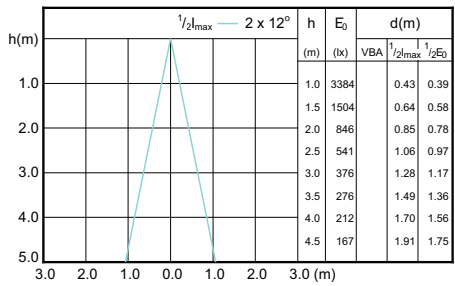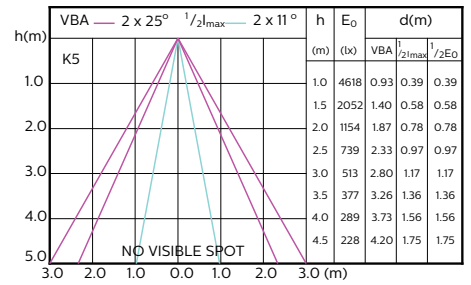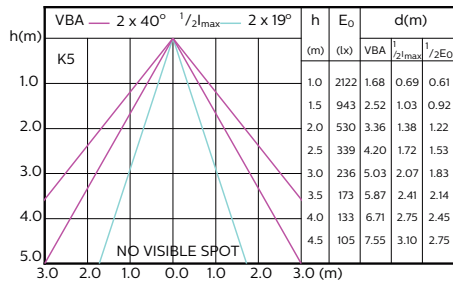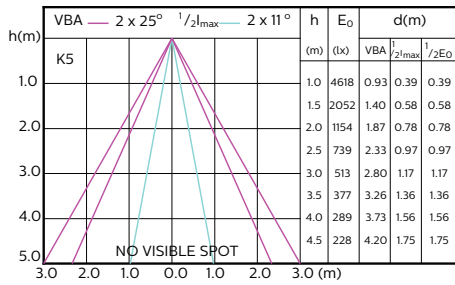

PAR30/PAR20 LED

Beam Diagrams

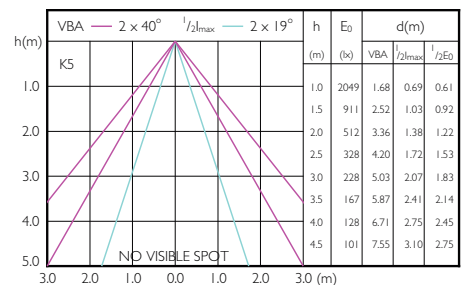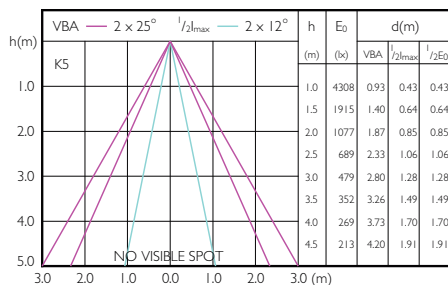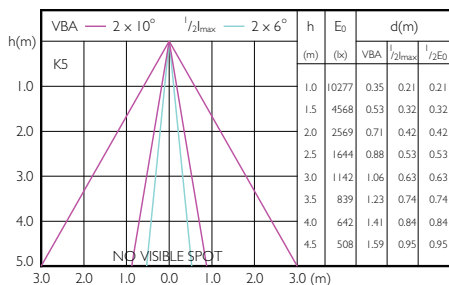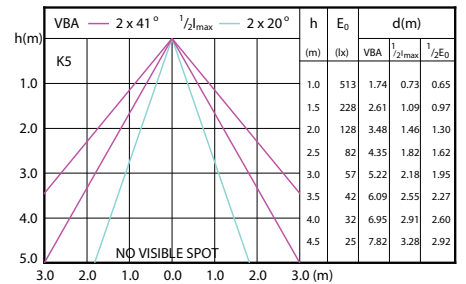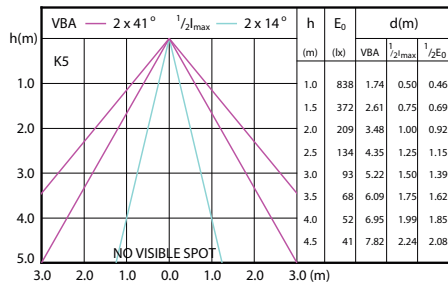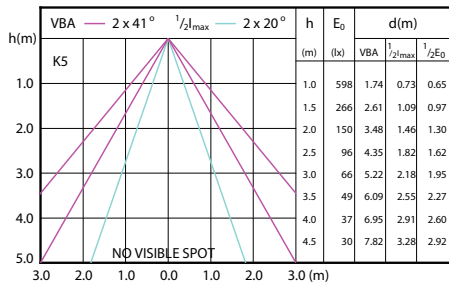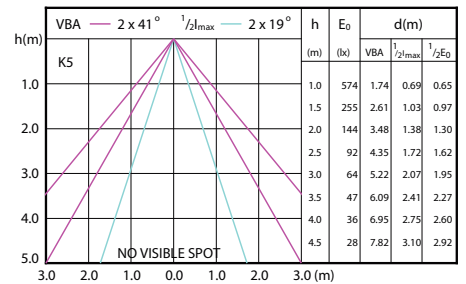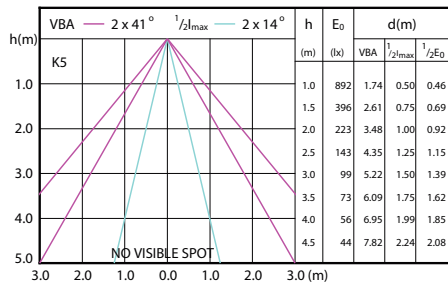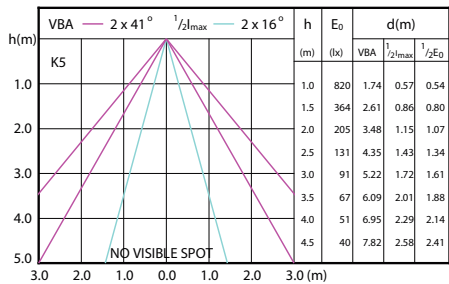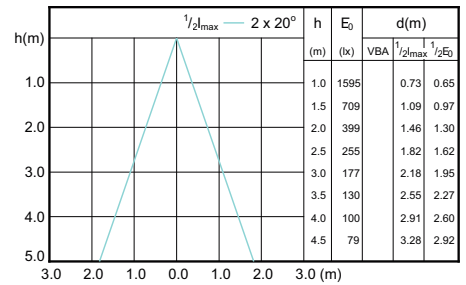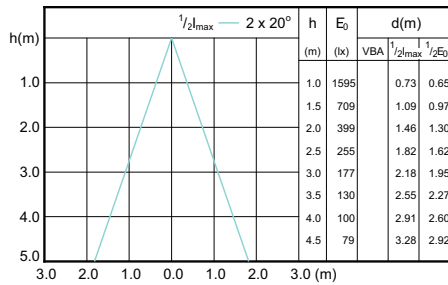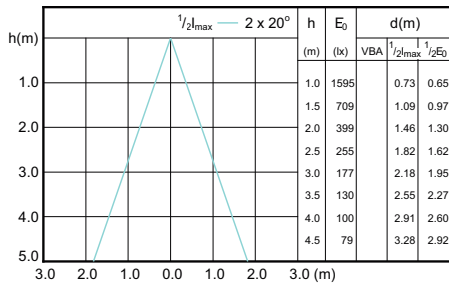

PAR30/PAR20 LED

Beam Diagrams

